


REVISION No. 9

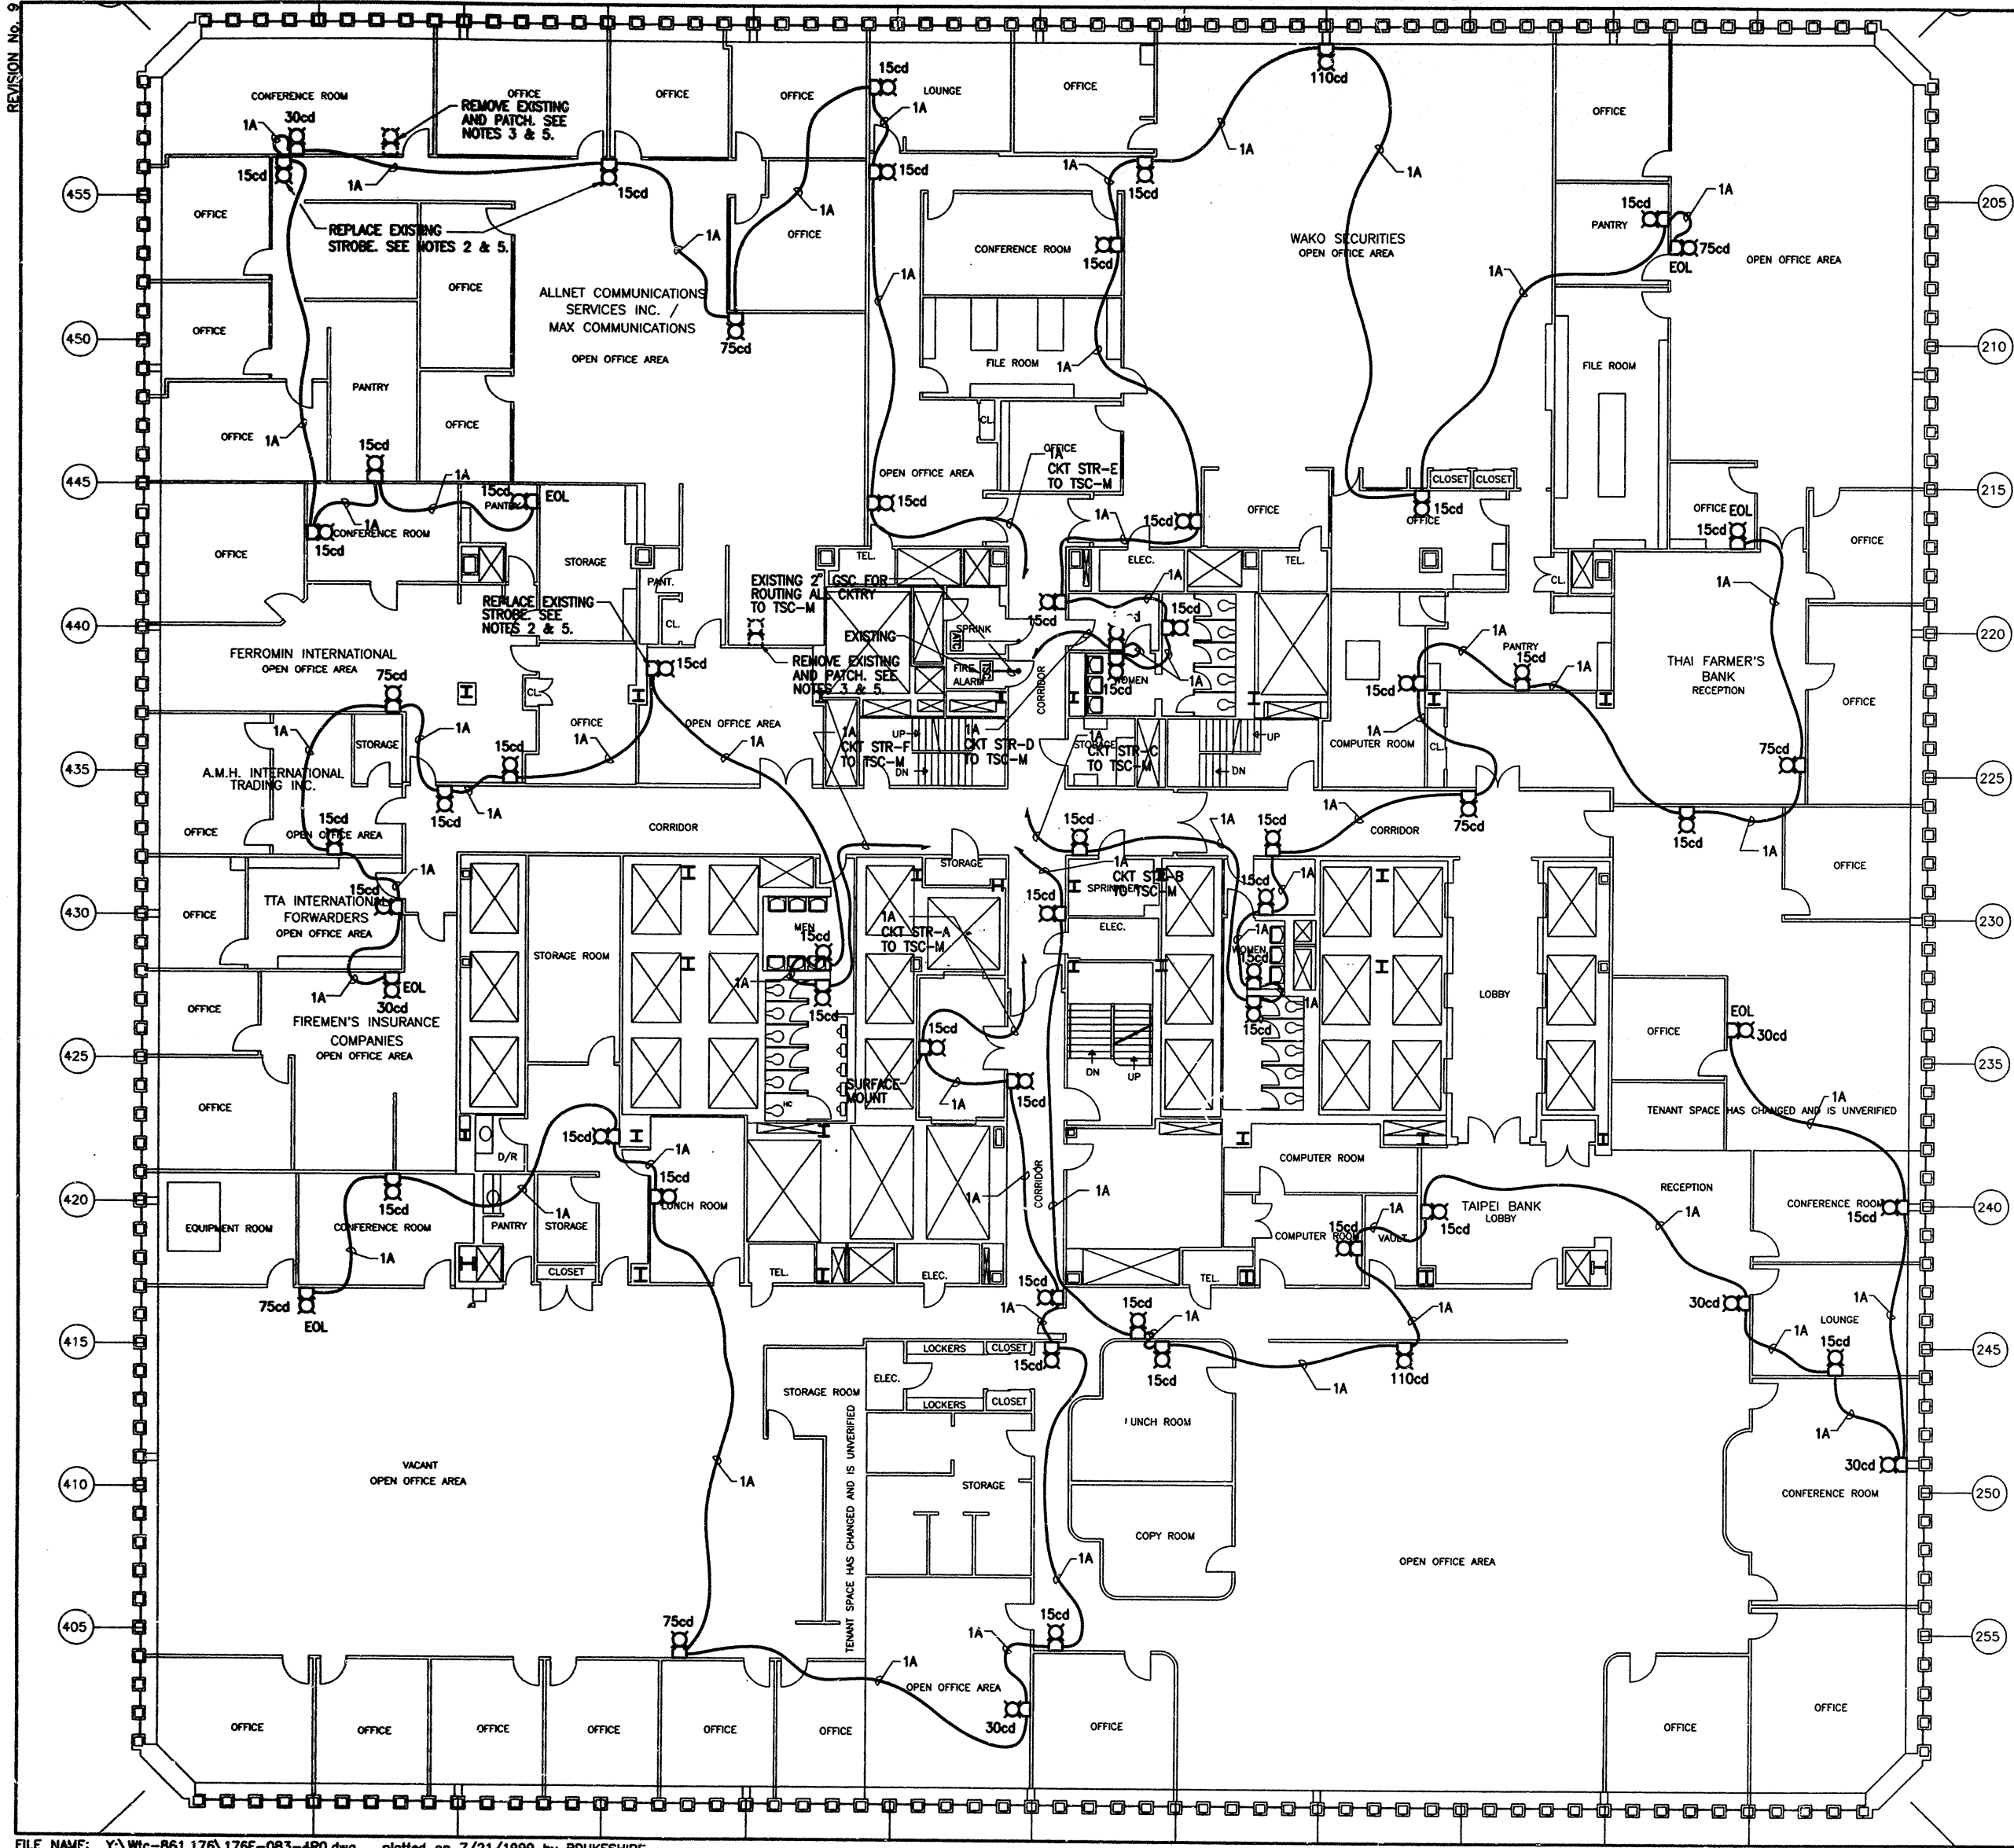


NOTES:

1. FOR LEGEND, ABBREVIATIONS, AND GENERAL NOTES, SEE DWG. E-1. FOR INSTALLATION DETAILS, SEE DWG. E-2. FOR WIRING DIAGRAMS, SEE DWG. E-3.
2. REPLACE EXISTING STROBE WITH THE SHOWN CANDELA RATED STROBE, AND REWIRE AS SHOWN. EXISTING BACKBOX AND CONDUIT STUB CAN BE UTILIZED IF IT IS SIMILAR TO THE TYPICAL STROBE OR COMBINATION BOX. SEE INSTALLATION DETAIL "B" ON DWG. E-2.
3. ONLY AFTER INSTALLED STROBES ARE TESTED AND OPERATIONAL, SHALL CONTRACTOR REMOVE EXISTING STROBE IN THE PRESENCE OF THE ENGINEER. PATCH WALL TO MATCH EXISTING WALL FINISH.
4. SINCE FIRE ALARM CIRCUIT LENGTH IS CRITICAL, ROUTING AND INSTALLATION OF A/L FIRE ALARM CIRCUITS SHALL BE AS SHOWN ON DRAWING.
5. DISCONNECT AND ABANDON EXISTING STROBE CIRCUITS IN CEILING. TAPE ENDS OF ABANDONED CONDUCTORS AND TAG AS ABANDONED. THIS WORK SHALL BE DONE IN THE PRESENCE OF THE ENGINEER.

STROBE CIRCUIT/LOADING TABLE

STROBE TYPE AND RATING	TYPE	15cd	30cd	75cd	110cd	CURRENT PER CIRCUIT (AMPS.)	CIRCUIT LENGTH (FT.)
QUANTITY OF STROBES PER CIRCUIT	STR-A	8	1	2	0	0.934	429
	STR-B	7	3	0	1	0.950	407
	STR-C	9	0	2	0	0.897	339
	STR-D	9	0	1	1	0.941	382
	STR-E	8	1	1	0	0.769	391
	STR-F	7	1	1	0	0.706	303
GRAND TOTAL						5.197	2251

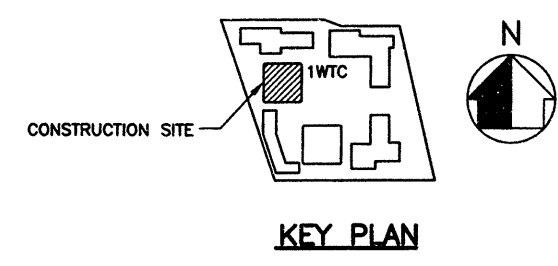

Sheet 33 of 75

THE PORT AUTHORITY OF NY & NJ

CHIEF ELECTRICAL ENGINEER

1 8/23/99 AS-BID
No. Date Revision Approved

ENGINEERING DEPARTMENT
DESIGN DIVISION

WORLD TRADE CENTER

ELECTRICAL
Title
FIRE ALARM SYSTEM DEVICE UPGRADE
PHASE III
1 WORLD TRADE CENTER
CONTRACT NO. 3
83rd FLOOR
STROBE
INSTALLATION AND REMOVAL PLAN

This drawing subject to conditions in Contract. All inventions, ideas, designs and methods herein are reserved to Port Authority and may not be used without its written consent.

S. FELDSTEIN E. KOTSKI A.S.
Designed by Drawn by Checked by

AUGUST 9, 1999
Date

WTC-861.176 E-083-4
Contract Number Drawing Number